



DSI to HDMI Adapter

Errata Document

Document Revision History

Date	Doc. Rev.	Notes
2019-04-23	Rev. 1.0	Added errata about DDC channel

Overview

Errata #1: I2C address conflict with certain HDMI monitors	4
--	---

Errata #1: I2C address conflict with certain HDMI monitors

Affected Version: **[01521000] DSI to HDMI Adapter V1.0A**


Fixed in: **[01521100] DSI to HDMI Adapter V1.1A**

1.1 Description

I2C address conflict with certain HDMI monitors caused that adapter does not work with the 4.14.78 BSP. Not connecting the DDC I2C channel resolves the issue.

1.2 Workaround

Unsoldering T3 on the adapter, resolves the issue by disconnecting the monitor's DDC channel.

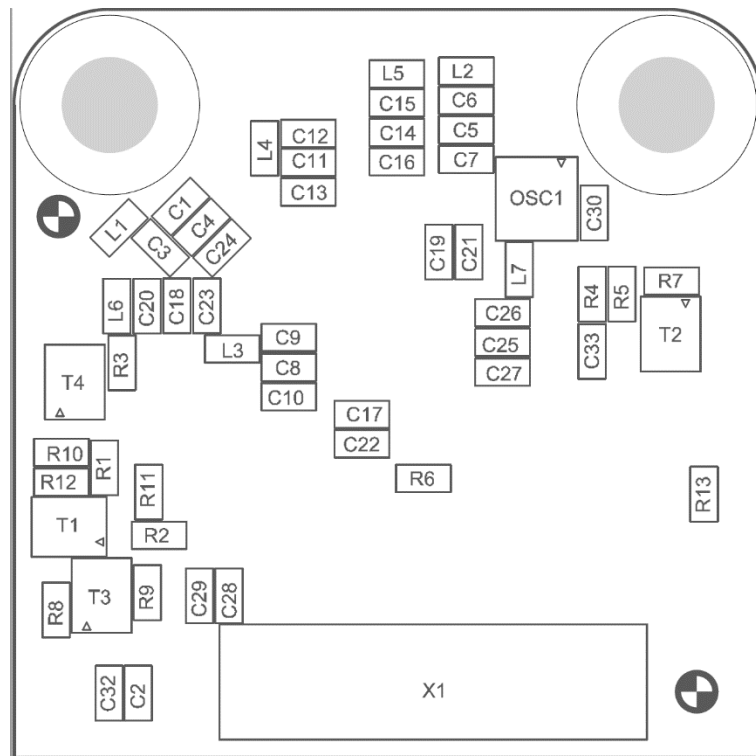

DISCLAIMER:

Copyright © Toradex AG. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies.

Brand and product names are trademarks or registered trademarks of their respective owners. Specifications are subject to change without notice.